

Performance with bucket

Tipping load, articulated at 40° (ISO 14397-1) - QT	2528.00
3339.00KG	
Tipping load, articulated at 40° (ISO 14397-1) - BT	2340.00
3025.00KG	
Tipping load, straight (ISO 14397-1) - BT	3611.00
2756.00KG	
Rated operating capacity, articulated (ISO 14397-1) - QT	2022.00
1670.00KG	
Tipping load, straight (ISO 14397-1) - QT	3964.00
3011.00KG	
Rated operating capacity, articulated (ISO 14397-1) - BT	1513.00
1872.00KG	
Rated operating capacity, straight (ISO 14397-1) - BT	1806.00
2205.00KG	

Performance with pallet fork

Rated operating capacity, straight (ISO 14397-1) - QT	2409.00KG
---	-----------

Hydraulic System

Hydraulic tank	27.20
61.00L	

Drive System

Transmission	Hydrostatic with electronic regulation
Main drive	Proportionally regulated hydrostatic motor

Traction

Standard tyres	405/70R20
----------------	-----------

Fluid Capacities

Fuel tank	78.80L
-----------	--------

Controls

Travel Direction	Travel direction switch (F-N-R) on joysticks. Drive pedal in work and travel mode.
Vehicle braking	Combination of integrated 6 wet brake disk in rear axle with hydrostatic braking effect provision
Machine hydraulics	Dual axis joystick for lift, tilt and auxiliary
Vehicle steering	Machine articulation via hydraulic steering with steering wheel

Engine

Torque at 1800 RPM (SAE J1995 Gross)	281.4 nmNEWTON-M
Engine oil with filter capacity	8.40L
Displacement	2.39L
Power at 2600 RPM (ISO 14396)	55.20KW
Compliance	Stage V (V)
Number of Cylinders	4
Cooling	53% PROPYLEN GLYCOL / 47% WATER MIXTURE
Fuel	Diesel
Make / Model	DOOSAN INFRACORE / 2.4L BOBCAT ENGINE DM02-MFL11

Weights


Operating weight, standard (ISO 6016)	5316.00KG
Shipping weight, standard (ISO 6016)	4896.00KG
Max. dynamic axle load	5500.00KG
Max. static axle load	9000.00KG

Options

• Beacon	• Brakes German
• Deluxe pressurized cab with HVAC	• Fire Extinguisher
• High-flow auxiliary hydraulics	• Road Package
• Road Lights LED German Homologation	• Radio FM/AM/DAB+/Phone Ready
• Power Bob-Tach™	


Attachments

Dimensions - Pallet fork

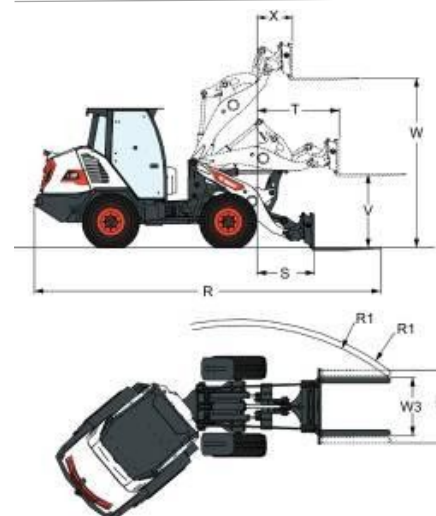

(R) 5959.10 MM	(V) 1399.00 MM
(R*) 6188.60 MM	(V*) 1347.30 MM
(S) 750.10 MM	(W) 3125.00 MM
(S*) 980.00 MM	(X) 416.40 MM
(T) 1252.20 MM	(X*) 603.80 MM
(T*) 1441.00 MM	

Dimensions

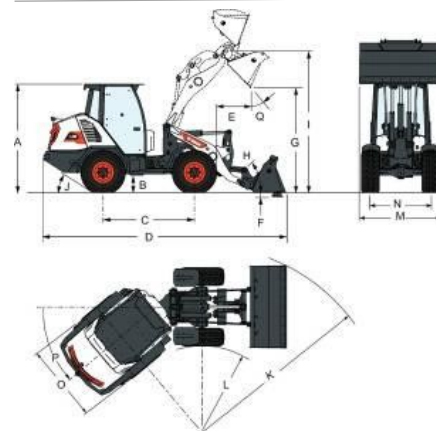

(A) 2522.70 MM	(K*) 4315.80 MM
(B) 337.40 MM	(L) 1985.60 MM
(C) 2100.00 MM	(M) 1900.00 MM
(D) 5433.60 MM	(N) 1393.00 MM
(D*) 5570.00 MM	(O) 1800.00 MM
(E) 660.50 MM	(P) 40.00
(E*) 756.90 MM	(Q) 45.00
(I) 3275.00 MM	(F) 75.00 MM
(J) 33.30	(G) 2532.50 MM
(K) 4280.40 MM	(G*) 2436.00 MM

- Miscellaneous
- Snow Blades
- Snow V-Blades
- Spreaders

- Mixing Buckets
- Snow Pushers
- Spreader
- Sweepers

Standard Features

- | | |
|---|--|
| <ul style="list-style-type: none">• 40 km/h max drive speed• Automatic Ride Control• Bobcat Telematics Europe• Brakes Standard• Cloth Heated Air Ride Seat w/LH armrest• Differential Lock• Power Quicktach• Rear View Camera• Standard-flow auxiliary hydraulics• 12 V power outlet• Wheels 405/70 R20 | <ul style="list-style-type: none">• Advanced Attachment Controls• 7-pin attachment control• Bucket Level Indicator• Automatic parking brake• Deluxe pressurized cab with heating• Key Ignition with Password• Radio Ready• Road Lights LED• Work Lights LED• USB Charger• Warranty: 24 months or 2000 hours (whichever occurs first) |
|---|--|

B5Y3 11001 — B5Y3 99999 • • ©2025 Bobcat EMEA - www.bobcat.com/eu
Specifications are subject to change without notice - Pictures of Bobcat units may show other than standard equipment